

Zinc Plated Winch Hook


Bright Zinc Plated (BZP)



Product Overview

Our Zinc Plated Winch Hook is a heavy-duty, robust solution for winching and recovery applications. Manufactured from **high-strength steel** and finished with a **Bright Zinc Plating (BZP)**, it offers excellent durability and corrosion protection. It features a strong, **spring-loaded safety catch** to ensure straps and cables remain attached. This hook is rated with a Minimum Breaking Load (M.B.L.).

Important Safety Notice: This hook is rated with a Minimum Breaking Load (M.B.L.) of 3.5T. The M.B.L. is the point of failure and should not be used as the Working Load Limit (W.L.L.). A suitable factor of safety (e.g., 4:1 or 5:1) must be applied by a competent person to determine a safe W.L.L. for your specific application. Do not exceed the W.L.L. Not intended for overhead lifting.

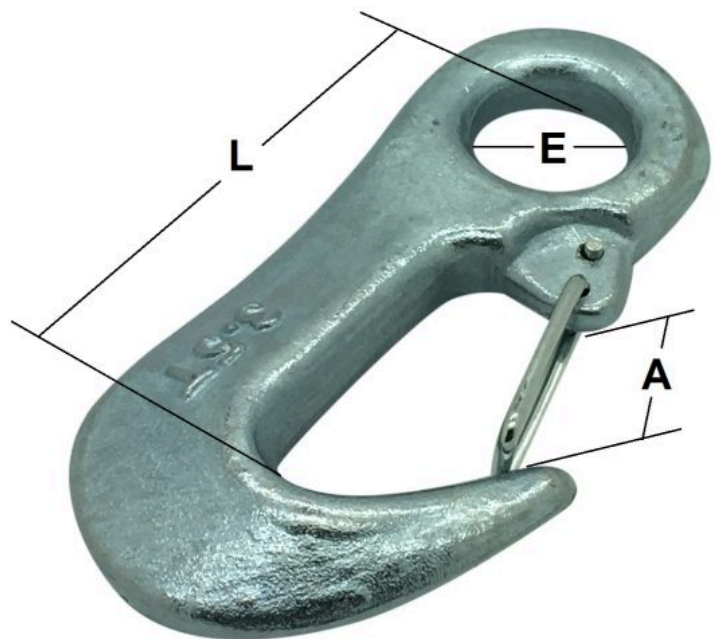

Technical Specifications

The following table outlines the key dimensions and rating for our zinc plated winch hook.

E (EYE DIAMETER)	L (LENGTH)	A (CATCH DISTANCE)	M.B.L.	PART CODE
17mm	64mm	17mm	3.5T	ZPWH

Important Safety Notice: The information provided is for guidance and reference purposes only. Dimensions, specifications, and ratings (M.B.L.) are approximate. **This hook is not intended for overhead lifting.** The Minimum Breaking Load (M.B.L.) is the point of failure and must not be used as a Working Load Limit (W.L.L.). A competent

person must apply a suitable factor of safety to determine a safe W.L.L. for any given application. Deacon Products assumes no liability for the misuse or misapplication of this information or our products.
